
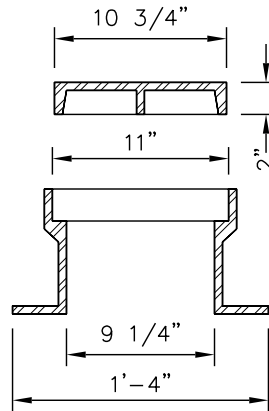


CAPITOL FOUNDRY VB-9 BY-PASS VALVE BOX ITEM NUMBER VB-9*S	
MATERIAL SPECIFICATION	COATING
GRAY IRON ASTM A48 CLASS 30	BITUMEN

**PLAN VIEW****PROFILE****TURF APPLICATION****PAVED APPLICATION**

TOP OF CLEAN-OUT TO BE BETWEEN
4"-6" FROM TOP OF BOX

CLEAN-OUT BOX AND LID
(SET TO FINISH GRADE)

C.I. FERRULE WITH BRASS PLUG

FERNCO COUPLING
W/ STAINLESS STEEL
ADJUSTABLE CLAMPS

4" DUCTILE IRON PIPE

45° BEND

4" DUCTILE IRON PIPE
SERVICE LATERAL
CONFIGURATION VARIES

4" MJ PLUG

SERVICE CONNECTION MUST BE
MADE AT THIS POINT. (USE
TRANSITION GASKET WHEN
ATTACHING TO PVC OR CISP
SERVICE LATERAL.)

ROMAC INDUSTRIES, INC.
CB-4.80(6"-12")
CB-4.80LS(14"-24")
SEWER SADDLE AT 45°

4" TAP AT 2 O'CLOCK OR 10 O'CLOCK
POSITION. IF GOOSE NECK FITTING IS USED,
PROVIDE APPROVED SUPPORT METHOD

MAINTAINED BY
CITY

MAINTAINED BY
PROPERTY OWNER

NOTES:

1. This detail depicts a typical layout. Variations may be approved.



Department of Utilities
10455 Armstrong Street
Fairfax, VA 22030-3630

CITY of FAIRFAX
USE WITH THE FAIRFAX STANDARD SPECIFICATIONS ONLY

Voice (703) 385-7920
FAX (703) 934-8427
www.fairfaxva.gov

**4" SEWER TAP and STUB-OUT
PAVED APPLICATION CLEAN OUT**

SCALE:
Not To Scale

REVISION DATE:
July, 2005

DETAIL #
2 534.02

SHEET #:
1 of 1